

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 152 597 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
07.11.2001 Bulletin 2001/45

(51) Int Cl.7: H04N 1/60

(21) Application number: 01110598.8

(22) Date of filing: 30.04.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

- Degani, Ammar T.
Rochester, New York 14618 (US)
- Wiegand, Michael A.
Webster, New York 14580 (US)
- Eddy, Richard J.
Fairport, New York 14450 (US)

(30) Priority: 01.05.2000 US 563029

(71) Applicant: Xerox Corporation, Patent Department
Rochester, New York 14644 (US)

(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(72) Inventors:
• Henderson, Todd R.
Conesus, New York 14435 (US)

(54) Calibration for an image output device

(57) A system for compensating for a calibration drift in an image output device includes a user input means for specifying an output medium. An image output device controller converts original image data to final image data used by the image output device. The image output device produces a calibration image, as a function of an output medium, for a plurality of halftone

screens capable of being produced by the image output device. A processor communicates with the controller. The processor calculates a plurality of candidate tone reproduction curve sets for the specified output medium. Each of the sets corresponds to one of the plurality of halftone screens. The candidate tone reproduction curve sets are accepted for compensating for a calibration drift in the image output device.

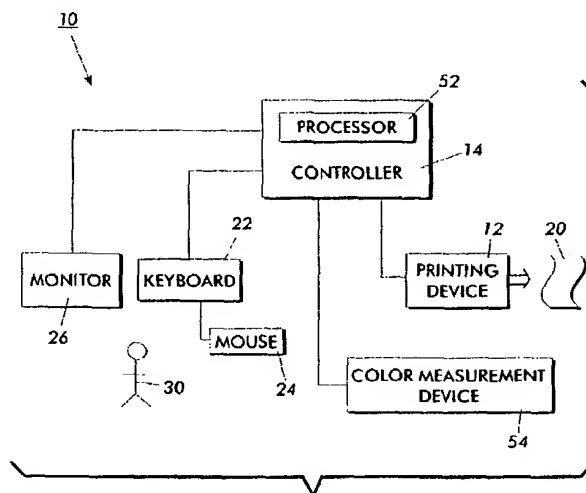


FIG. 1

Description

Background of the Invention

[0001] The present invention relates to calibrating an electronic printer output device. It finds particular application in conjunction with calibrating an electronic printer output device using a tone reproduction curve ("TRC") and will be described with particular reference thereto. It will be appreciated, however, that the invention is also amenable to other like applications.

[0002] An electronic printer output device ("printing device"), also referred to as an image output terminal ("IOT"), is generally capable of producing color and standard black-and-white tones to produce images. The printing device accepts color level specifications (typically for each of four (4) colors including cyan, magenta, yellow, and black ("CMYK")) as input and produces corresponding color areas on a printed page. This production of the corresponding color areas is often performed by a screening operation (also referred to as a halftoning operation) wherein a fine pattern of color dots is printed. The dots appear as varying color tones in accordance with the number of color dots used when viewed from a distance. The allowed color level specifications for each of the CMYK color spaces generally vary over some finite range such as 0 to 1 or 0 to 255. The colors at the extremes (i.e., 0 and 1 or 0 and 255) are white and saturated CMYK colors, and numbers between the extremes yield intermediate color tones. However, while the color level specifications may vary linearly, a linear change in color levels typically does not result. Instead, there may be a particular threshold before lighter toned colors become visible. Similarly, darker toned colors may prematurely appear saturated.

[0003] A printing device is designed to operate under certain conditions. More specifically, a printing device is calibrated to operate at an ideal set-point, for producing relatively consistent output when used within an environment having specific desired operating parameters such as, for example, a specific humidity, temperature, and dust count, etc. If any of the operating parameters deviates from the desired operating parameter, the printing device may drift away from the ideal set-point. To some extent the drift can be corrected with controlled feedback mechanisms within the printing device itself, but typically requires further corrective action to maintain color consistency in the printed output. This invention relates to this corrective action.

[0004] One way to compensate for the drift within the printing device includes modifying data within a printing device output device controller ("controller"). The controller converts image data (e.g., PostScript® data or PDF data) into raster data, which is transmitted to the printing device where it is printed. More specifically, a calibration (or correction) TRC modifies the raster data before it is sent to the printing device. The resulting image produced by the printing device using the corrected

raster data is printed correctly (i.e., as if the printing device had not drifted from the ideal set-point and the data was not corrected by the TRC). Both linear and nonlinear drifts within a printing device may be compensated by using calibration TRCs.

[0005] In order to accurately produce a desired color level, the correspondence between the color level specification of the printing device and the actual color level produced by the printing device must be known. The TRC provides an illustration of the corresponding relationship.

[0006] In order to determine the TRC, a sample set of color level specifications are printed and the color levels actually produced by the printing device are measured by a device such as a colorimeter or spectrophotometer. The measured points are then used as raw data to calculate a set of curves. The set of curves produced are referred to as the calibration TRCs, or simply as TRCs. Various methods exist for creating TRCs. One such method is set forth in U.S. Patent No. 5,696,889, which is hereby incorporated by reference.

[0007] Although TRCs can be created and applied to correct for drifts in a printing device output, there is currently no method or system that permits a user to specify a boundary (e.g., page, set, or job) after which a calibration process begins for a specified output medium. Furthermore, there is no method or system that permits the user to then specify a boundary (e.g., page, set, or job) after which TRCs that were calculated during the calibration process will be applied to future outputs of the printing device.

[0008] The present invention provides a new and improved apparatus and method which overcomes the above-referenced problems and others.

Summary of the Invention

[0009] A method for calibrating a printer output device identifies an output medium. A calibration image is produced on the output medium. The calibration image represents a plurality of available halftone screens. Colors on the calibration image are measured. A plurality of candidate tone reproduction curve sets are calculated for the identified output medium. Each of the sets corresponds to one of the available halftone screens. The sets of the tone reproduction curves are accepted for calibrating the printer output device to compensate for drifts from an optimum set-point.

[0010] In accordance with one aspect of the present invention, a calibration boundary is identified. An output process of the image output terminal is suspended after the identified calibration boundary.

[0011] In accordance with another aspect of the present invention, the calibration image on the medium is input into an image processor.

[0012] In accordance with a more limited aspect of the present invention, versions of existing sets of tone reproduction curves, which were previously stored in the

image processor, are browsed.

[0013] In accordance with an even more limited aspect of the present invention, one of the existing sets of tone reproduction curves is compared with one of the candidate sets of the tone reproduction curves.

[0014] In accordance with another aspect of the present invention, an acceptance boundary, after which the accepted tone reproduction curve will be used for calibrating the printer output device, is specified.

[0015] In accordance with another aspect of the present invention, an alternative output medium, which is to be associated with the accepted set of tone reproduction curves, is selected.

[0016] In accordance with another aspect of the present invention, a reversion is made to a previous version of existing sets of tone reproduction curves for any identified output medium.

[0017] One advantage of the present invention is that it provides a method and system for applying various sets of TRCs that are dependent on output mediums and/or halftoning screens.

[0018] Another advantage of the present invention is that it provides a method and system for calculating various sets of TRCs after a user specified page, set, and/or job boundary.

[0019] Another advantage of the present invention is that it provides a method and system for applying the various sets of TRCs after a user specified page, set, and/or job boundary.

[0020] Furthermore a system as defined in claim 9 is provided.

In a further embodiment the system for compensating for a calibration drift in an image output device further includes:

an image input device for converting the calibration image into calibration data, which is transmitted to the processor for calculating the plurality of candidate tone reproduction curve sets.

[0021] In a further embodiment the system further includes:

means for displaying different candidate tone reproduction curve sets and visually comparing the displayed candidate set of tone reproduction curves with an existing set of tone reproduction curves.

[0022] In a further embodiment an output process of the image output device is suspended after a calibration boundary, which is set by a user, is reached, the calibration image being produced after the output process is suspended.

[0023] In a further embodiment the system further includes:

means for deleting the accepted set of tone reproduction curves and reverting to an existing set of tone reproduction curves.

[0024] In a further embodiment the accepted set of tone reproduction curves is used by the controller for converting original image data to final image data after an acceptance boundary is reached, the acceptance

boundary being specified by a user.

[0025] Furthermore, a method according to claim 10 is provided.

In a further embodiment, in the method for compensating for a calibration drift in an image output device the accepting step includes:

selecting the candidate tone reproduction curve set.

[0026] In a further embodiment the method further includes:

specifying an acceptance boundary, the step of processing being performed after the acceptance boundary is reached.

[0027] In a further embodiment the method further includes:

viewing existing sets of tone reproduction curves; and
comparing an existing set of tone reproduction curves with a candidate set of tone reproduction curves.

[0028] In a further embodiment the method further includes:

storing the candidate sets of tone reproduction curves for use in the future as the existing sets of tone reproduction curves.

[0029] In a further embodiment the method further includes:

reverting to a previously stored set of tone reproduction curves.

[0030] Still further advantages of the present invention will become apparent to those of ordinary skill in the art upon reading and understanding the following detailed description of the preferred embodiments.

Brief Description of the Drawings

[0031] The invention may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for purposes of illustrating a preferred embodiment and are not to be construed as limiting the invention.

FIGURE 1 illustrates a system according to the present invention;

FIGURE 2 illustrates a flowchart according to the present invention; and

FIGURE 3 illustrates a computer display screen according to the present invention.

Detailed Description of the Preferred Embodiments

[0032] With reference to FIGURE 1, a system 10 for compensating for a calibration drift includes an electronic printer output device ("printing device") 12, also referred to as an image output terminal ("IOT"), and a printer output device controller ("controller") 14 (image

data generator). In the preferred embodiment, the printing device is a color printer. However, it is also contemplated that the printing device be a black-and-white printer or a color and black-and-white facsimile machine.

[0033] The controller 14 converts original image data (e.g., PostScript® or PDF format), which is received by the controller 14, to final image data (e.g., raster data). The final image data is transmitted from the controller 14 to the printing device 12, which renders the image data on an output medium 20. In the preferred embodiment, the output medium is some type of paper (e.g., glossy or semi-glossy). However, other types of output media (e.g., plastic transparency) are also contemplated.

[0034] By operating various input devices (e.g., a keyboard 22 and/or a mouse 24) and a viewing monitor 26, which communicate with the controller 14, a user 30 is capable of correcting a calibration drift (or a drift from an optimum set-point), which is associated with the printing device 12, by processing the final image data that is transmitted to the printing device 12. In other words, if the calibrated settings of the printing device 12 drift over time, the final image data that is transmitted to the printing device 12 may be modified to bring the output produced by the printing device 12 back to the desired quality.

[0035] FIGURE 2 shows a flowchart 32 of a method for calibrating the printing device 12 to compensate for calibration drifts. FIGURE 3 illustrates a preferred display screen 34 that may be viewed by the user during the calibration process outlined in FIGURE 2.

[0036] With reference to FIGURES 1-3, a method for compensating for a calibration drift within the printing device 12 starts at a step 200. A determination is made in a step 202 if the user 30 merely desires to revert back to a previously stored set of TRCs. If the user 30 does wish to revert to a previous set of TRCs, control passes to a step 250. The reversion process will be described in more detail below. Otherwise, if the user 30 does not wish to revert to a previous set of TRCs, control passes to a step 204.

[0037] A calibration boundary is specified by the user 30 in the step 204. More specifically, using the keyboard 22 or mouse 24, the user 30 selects one of three (3) "buttons" 40, 42, 44 displayed on the monitor 26. In this way, the user 30 delays the calibration process from beginning until after the specified calibration boundary is reached.

[0038] An output "job" includes one or more "sets," while each "set" includes one or more groups of "pages." Therefore, a user may, for example, desire to print five (5) sets of groups, each of which includes three (3) pages. Clicking on the Page Boundary button 40 delays the beginning of the calibration process until after the current page is completely printed; clicking on the Set Boundary button 42 delays the beginning of the calibration process until after the current set (e.g., group of

three (3) pages) is completely printed; clicking on the Job Boundary button 44 delays the beginning of the calibration process until after the current job (e.g., all five (5) sets) is completely printed.

5 [0039] There are several reasons why it is desirable to specify a calibration boundary for delaying the start of the calibration process. For example, although an output quality has begun to deteriorate, it may be desirable to keep all pages within each set to a consistent level of
10 quality, which would be achieved by clicking the Set Boundary button 42. Alternatively, if it is desirable to maintain a consistent level of quality within a job, the user would click the Job Boundary button 44. Furthermore, because the process described below requires a
15 calibration image (target image) to be produced, the Page Boundary button 40 alerts the system to finish printing the current page so that a complete calibration page (target page), which includes the calibration image, may be produced.

20 [0040] Once the calibration boundary is reached, the controller 14 suspends an output process of the printing device 12 in a step 206. Then, in a step 208, the user 30 specifies the type of medium (e.g., glossy paper, matted paper, clear transparency, etc.) on which the calibration
25 image (target image) is to be produced by selecting a Media Programming button 46. The target image is produced, in a step 212, on the specified medium using the printing device 12 by selecting a Print button 50. Preferably, the target image represents all the halftone
30 screens supported by the printing device 12. The target image is input into an image processor 52 in a step 214, preferably using a color measurement device 54, such as a colorimeter or spectrophotometer, by selecting a Scan button 56. More specifically, colors on the target
35 image are measured in the step 214. Then, data representing the measured colors is transmitted from the scanning device 54 to the processor 52, which is preferably included within the controller 14. Then, the processor 52 calculates candidate sets of tone reproduction
40 curves. The number of sets so produced is preferably the same as the number of halftone screens supported by the printing device 12. It is to be understood that the candidate sets of TRCs are stored in the processor 52. In this manner, the candidate sets of TRCs may be recalled at a future time as existing TRCs, the benefits of
45 which will become apparent from the discussion outlined below.

[0041] Each of the candidate sets of TRCs represents one of the halftone screens supported by the printing
50 device 12. Furthermore, each of the sets preferably includes four (4) lines 60a, 60b, 60c, 60d; each of the lines 60a, 60b, 60c, 60d corresponds to one of the colors in the CMYK color space.

[0042] In a step 216, the user 30 displays one of the
55 sets of TRCs. More specifically, the user 30 selects one of the screen types using a Screen Type button 64 before selecting a Display button 62. Once the Display button 62 is selected, an image of the candidate set of

TRCs 60 for the selected screen type is displayed.

[0043] Then, in steps 220, 222, 224, the user 30 browses through previously stored versions of TRCs (i. e., existing TRCs) for the specified medium type, which are stored in the controller 14 and classified according to halftone screens. As discussed above, the candidate sets of TRCs that were calculated by the processor 52 will be available as existing TRCs in future calibration processes.

[0044] In the step 220, the user 30 displays one of the existing TRC sets 66. More specifically, the user 30 chooses a halftone screen type by selecting a Screen Type button 70. Then, the user 30 chooses one of the existing versions for the selected screen type by selecting the Version button 72. The existing TRC set 66 for the selected halftone screen type and version is displayed when the user 30 selects the Display button 74. System information (e.g., the date the currently displayed existing set of TRCs was installed) is displayed in a window 68.

[0045] In the step 222, the user 30 compares the currently displayed candidate TRC set 60 with the currently displayed existing TRC set 66. For example, the user 30 may be familiar with the output that will be produced using the currently displayed existing TRC set 66. Furthermore, a sophisticated user may be able to determine whether the candidate TRC set 60 will produce acceptable output on the printing device 12 by comparing the lines 60a, 60b, 60c 60d with the lines 66a, 66b, 66c 66d in the existing curve 66.

[0046] In a step 223, the user 30 chooses whether to compare the lines 60a, 60b, 60c 60d with the lines 66a, 66b 66c 66d for another halftone screen type. If the comparison is desired, control returns to the step 216 where the lines are selected by halftone screen type (using the Screen Type button 64) and displayed by selecting the Display button 62, or to the step 220 where the lines are selected by halftone screen type (using the Screen Type button 70) and displayed by selecting the Display button 74. Otherwise, if the user 30 no longer wishes to compare the lines 60a, 60b, 60c 60d with the lines 66a, 66b 66c 66d for another halftone screen type, control passes to the step 224.

[0047] In the step 224, the user 30 determines whether to accept the currently displayed candidate TRC set 60. If the user 30 does not decide to accept the candidate TRC set 60, control passes to a step 234 for stopping the calibration process (if the user 30 determines not to accept the candidate TRC sets). Alternatively, if the user 30 determines to accept the currently displayed candidate TRC set 60, control passes to a step 226.

[0048] In the step 226, the user 30 sets an acceptance boundary after which the new (accepted) TRC set 60 (i. e., the currently displayed candidate TRC set) will be used by the processor 52 for generating future final image data. More specifically, the user 30 selects one of the Now, Set, or Job buttons 76, 78, 80 to indicate that the new TRC set 60 will be used beginning with the next

output page, set, or job, respectively. Then, in a step 230, the user 30 also sets the media type (by selecting a Media Attributes button 82) with which the new set of tone reproduction curves will be used. A default medium type, which is the medium type selected in the step 208, is initially displayed.

[0049] Once the type of medium that will be used with the currently displayed candidate TRC set 60 is selected, system information regarding the halftone screen types associated with the currently displayed candidate TRC set 60 is shown in windows 84, 86, 88. More specifically, the processor 52 preferably assigns identifying names to each of the halftone screens supported by the printing device 12. The identifying names are then displayed in the windows 84, 86, 88.

[0050] Then, the new tone reproduction curve set is accepted by selecting the Accept button 90 in a step 232.

[0051] If the user 30 wishes to produce a new tone reproduction curve set for another type of medium, the above described steps are carried out again by selecting said type of medium in 46 in the step 208. In this manner, the new TRC set accurately reflects the dependence on the medium type. However, rather than carrying out the above process again for another medium type, a less sophisticated user may wish to associate the current candidate TRC set 60 with another type of medium. If the user 30 wishes to do this in a step 233, control returns again to step 230 where an alternative medium is set by 82. This process continues until the user 30 wishes to associate no more medium types with the current candidate TRC set 60 in which case control passes to the step 234.

[0052] The calibration stops in the step 234. Then, the user 30 exits the calibration screen 34 by selecting an Exit button 99.

[0053] After the new TRC set has been accepted and new output has been produced by the printing device 12 as a function of the new TRC set, the user 30 may determine the quality of the new output is inferior. In this case, the user 30 may want to revert back to the most recently stored set of tone reproduction curves. Therefore, the user 30 starts the calibration process again in the step 200. Then, in the step 202, the user 30 indicates that reversion is desirable. Therefore, control passes to a step 250.

[0054] In the step 250, the user 30 sets a reversion boundary by selecting one of a Now, Set, or Job button 93, 94, 96, respectively. The selected reversion boundary indicates when the processor 52 will revert to the most recent set of TRCs; until the selected reversion boundary is reached, the currently selected set of TRCs 60 will continue to be used by the processor 52 for producing the final image data.

[0055] Then, in a step 252, the user 30 identifies the associated media attributes (e.g., the type of medium) of the TRC set to be deleted. More specifically, because different types of media may have been associated with

the candidate TRC set (e.g., in the step 230), the user 30 identifies the medium type of the TRC set to be deleted.

[0056] Then, in a step 254, the user 30 reverts to the most recent existing TRC set stored in the processor 52 by selecting a Revert Button 98. Control then passes to the step 234.

[0057] The invention has been described with reference to the preferred embodiment. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the invention be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

Claims

1. A method for calibrating a printer output device (12), comprising:
 - identifying (208) an output medium (20);
 - producing (212) a calibration image on the output medium (20), the calibration image representing a plurality of available halftone screens; measuring (214) colors on the calibration image;
 - calculating (214) a plurality of candidate tone reproduction curve sets (60) for the identified output medium (20), each of the sets (60) corresponding to one of the available halftone screens; and
 - accepting (232) the sets (60) of the tone reproduction curves for calibrating the printer output device (12) to compensate for drifts from an optimum set-point.
2. The method for calibrating a printer output device as set forth in claim 1, further comprising:
 - identifying a calibration boundary; and
 - suspending an output process of the image output terminal after the identified calibration boundary.
3. The method for calibrating a printer output device as set forth in claim 1, further comprising:
 - inputting the calibration image on the medium into an image processor.
4. The method for calibrating a printer output device as set forth in claim 3, further including:
 - browsing versions of existing sets of tone reproduction curves which were previously stored in the image processor.
5. The method for calibrating a printer output device

as set forth in claim 4, further including:

comparing one of the existing sets of tone reproduction curves with one of the candidate sets of the tone reproduction curves.

6. The method for calibrating a printer output device as set forth in claim 1, further including:
 - specifying an acceptance boundary after which the accepted tone reproduction curve will be used for calibrating the printer output device.
7. The method for calibrating a printer output device as set forth in claim 1, further including:
 - selecting an alternative output medium to be associated with the accepted set of tone reproduction curves.
8. The method for calibrating a printer output device as set forth in claim 1, further including:
 - reverting to a previous version of existing sets of tone reproduction curves for any identified output medium.
9. A system for compensating for a calibration drift in an image output device (12), comprising:
 - a user input means (22, 24) for specifying an output medium (20);
 - an image output device controller (14) for converting original image data to final image data used by the image output device (12), the image output device (12) producing a calibration image, as a function of the output medium (20), for a plurality of halftone screens capable of being produced by the image output device (12);
 - a processor (52) communicating with the controller (14), the processor (52) calculating a plurality of candidate tone reproduction curve sets for the specified output medium (20), each of the sets corresponding to one of the plurality of halftone screens; and
 - means (22, 24, 26) for accepting the candidate tone reproduction curve sets for compensating for a calibration drift in the image output device (12).
10. A method for compensating for a calibration drift in an image output device, comprising:
 - specifying a calibration boundary;
 - rendering a target output image on the image output device after the calibration boundary is reached, a plurality of halftone screens capable of being produced by the image output device being represented on the target output image;
 - measuring colors included on the target output image;
 - calculating a set of candidate tone reproduction

curves for each of the halftone screens;
accepting one of the candidate tone reproduction curve sets; and
processing future image data, which is used to
produce images on the output device, with the
accepted candidate set of tone reproduction
curves.

10

15

20

25

30

35

40

45

50

55

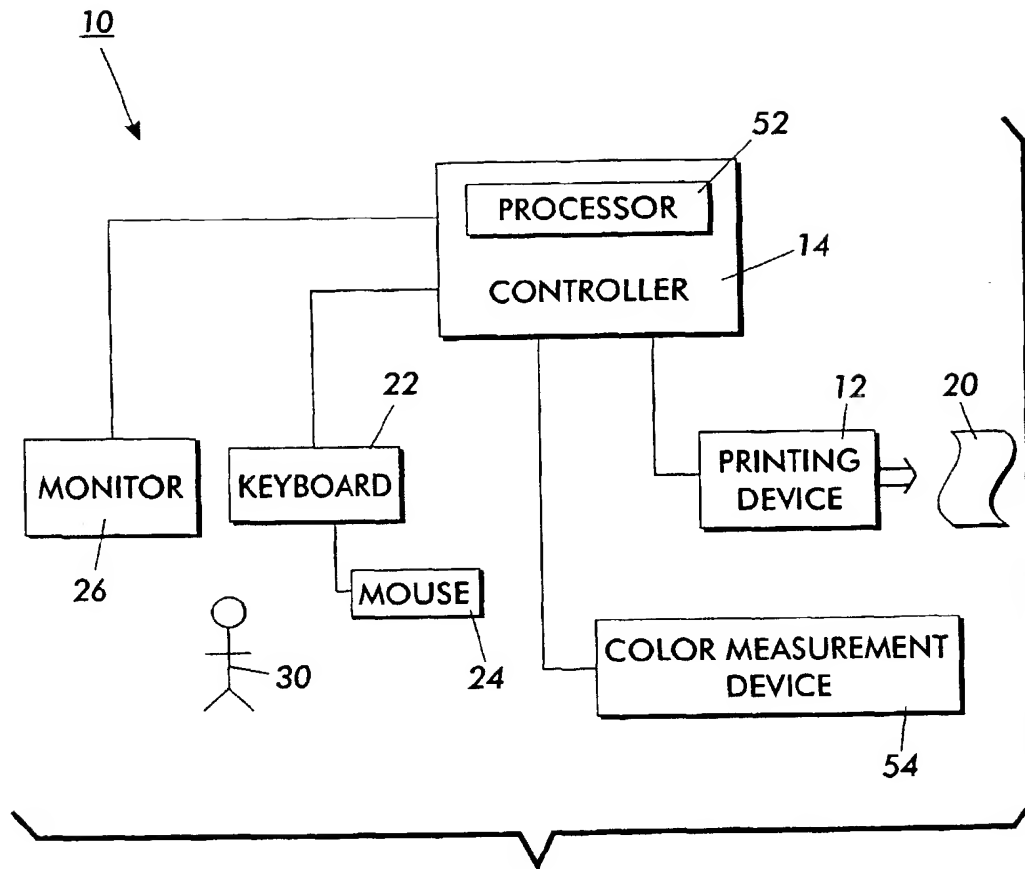


FIG. 1

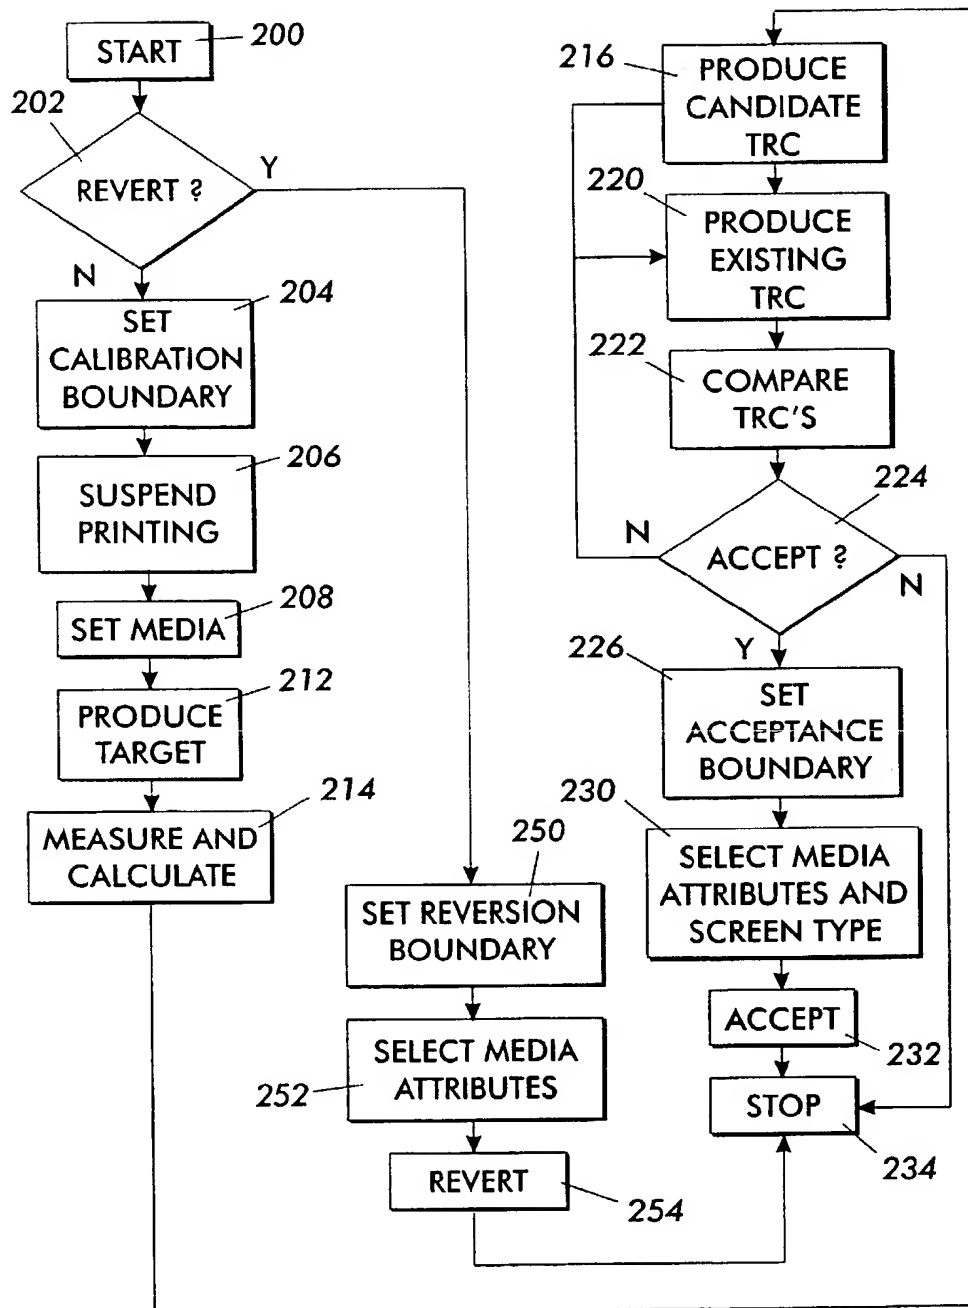


FIG. 2



FIG. 3

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 152 597 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
12.03.2003 Bulletin 2003/11

(51) Int Cl.7: H04N 1/60, H04N 1/407

(43) Date of publication A2:
07.11.2001 Bulletin 2001/45

(21) Application number: 01110598.8

(22) Date of filing: 30.04.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

- Degani, Ammar T.
Rochester, New York 14618 (US)
- Wiegand, Michael A.
Webster, New York 14580 (US)
- Eddy, Richard J.
Fairport, New York 14450 (US)

(30) Priority: 01.05.2000 US 563029

(71) Applicant: Xerox Corporation
Rochester, New York 14644 (US)

(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(72) Inventors:
• Henderson, Todd R.
Conesus, New York 14435 (US)

(54) Calibration for an image output device

(57) A system for compensating for a calibration drift in an image output device includes a user input means for specifying an output medium. An image output device controller converts original image data to final image data used by the image output device. The image output device produces a calibration image, as a function of an output medium, for a plurality of halftone

screens capable of being produced by the image output device. A processor communicates with the controller. The processor calculates a plurality of candidate tone reproduction curve sets for the specified output medium. Each of the sets corresponds to one of the plurality of halftone screens. The candidate tone reproduction curve sets are accepted for compensating for a calibration drift in the image output device.

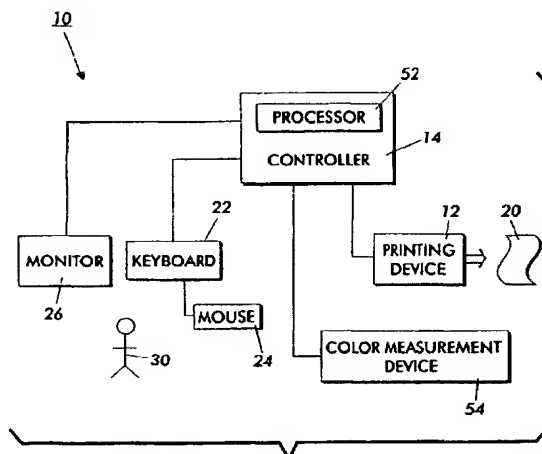


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 11 0598

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 612 902 A (STOKES MICHAEL) 18 March 1997 (1997-03-18)	1,3,9,10	H04N1/60 H04N1/407
Y	* column 4, line 17 - column 6, line 67 * ---	4	
Y	US 5 585 927 A (FUKUI KAZUYUKI ET AL) 17 December 1996 (1996-12-17) * column 8; figures 5,12 * ---	4	
X	US 6 048 117 A (BANTON MARTIN E) 11 April 2000 (2000-04-11)	1,3,9,10	
A	* column 3, line 45 - column 5, line 11 * ---	4	
A	US 5 838 465 A (SEINO TAISAKU ET AL) 17 November 1998 (1998-11-17) * column 12, line 13 - column 15, line 39 * -----	1,9,10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04N
Place of search BERLIN		Date of completion of the search 22 January 2003	Examiner Exner, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04-C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 11 0598

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-01-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5612902	A	18-03-1997	AU	3551595 A	29-03-1996
			WO	9608916 A1	21-03-1996
US 5585927	A	17-12-1996	JP	6086071 A	25-03-1994
US 6048117	A	11-04-2000	JP	2000001003 A	07-01-2000
US 5838465	A	17-11-1998	JP	3324307 B2	17-09-2002
			JP	8160704 A	21-06-1996
			JP	8251430 A	27-09-1996

THIS PAGE BLANK (USPTO)